



PCT/GB 2003 / 0 0 4 9 5 2  
Rec'd PCT/PTO 12 MAY 2005



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport

South Wales

NP10 8QQ

REC'D 18 DEC 2003

WIPO

PCT

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

*Stephen Hordley*

Dated

9 December 2003

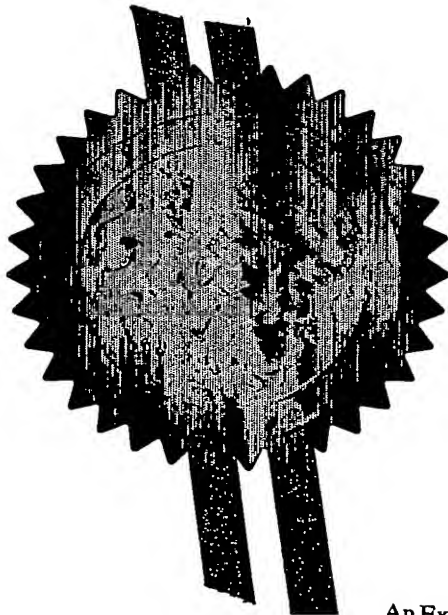

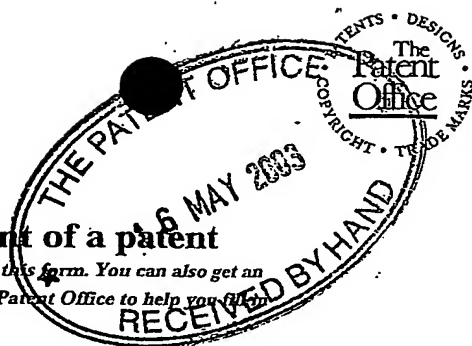

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

16 MAY 2003

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

HL82651/001/ECR

2. Patent application number

(The Patent Office will fill in this part)

0311334.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

(1) Russell Lee MARKS

9a High Street

Nutfield

Surrey RH1 4HH

8507469001

(2) Second applicant: see continuation sheet

8632820001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

VEHICLE IMMOBILISATION DEVICE

5. Name of your agent (if you have one)

Haseltine Lake

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Imperial House  
15-19 Kingsway  
London  
WC2B 6UD

Patents ADP number (if you know it)

34001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

UK

0226747.4

15/11/02

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

No

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 1

Description 14

Claim(s) 6

Abstract 1

Drawing(s) 9 + 9

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)


Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Haseltine Lake, Agents for the Applicants

Signature



Date

14 May 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mrs E Cooper-Rolfe

[020] 7420 0500

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

HL82651/001/ECR

ADDITIONAL APPLICANT SHEET

- (2) Colin James HEFFRON  
c/o 1 Neville Terrace  
London SW7 3AT

8632820001.

VEHICLE IMMOBILISATION DEVICE

The present invention relates to a vehicle immobilisation device.

5        Wheel clamp devices are in common use today for dealing with illegally parked vehicles. Such a wheel clamp device is attached to the wheel of an illegally parked vehicle by a wheel clamp operative so as to prevent the owner of the vehicle from driving the  
10       vehicle away. At the same time as deploying the wheel clamp device on the illegally parked vehicle, the wheel clamp operative will usually display a notice in the window of the vehicle informing the owner that the vehicle is illegally parked and that the wheel clamp  
15       device will remain on the vehicle until such a time as a penalty fee is paid. When the owner of the vehicle has contacted the authorities and paid the penalty fee, the wheel clamp operative is instructed to return to the vehicle to remove the wheel clamp device, after  
20       which the owner of the vehicle is free to remove the vehicle.

One problem with such existing wheel clamp devices is that, in order to be effective in immobilising the vehicle as well as strong and secure enough to prevent  
25       unauthorised removal of the device (by means of force or otherwise), they tend to be very bulky and heavy. Furthermore, the complexity of many such wheel clamp devices makes the successful and secure deployment very difficult to achieve for an inexperienced wheel clamp  
30       operative. The wheel clamp operative can also be put at a great risk when deploying a wheel clamp device on a vehicle that is parked flush to an obstacle on one side (for example a kerb), forcing the operative to work in the flow of oncoming traffic on the exposed  
35       side of the vehicle. Wheel clamp devices are also

often ineffective against large-wheeled vehicles such as trucks and buses.

It is therefore desirable to provide a vehicle immobilisation device which is free from the above-mentioned problems associated with the use of traditional wheel clamp devices.

According to a first aspect of the present invention there is provided a vehicle immobilisation device for securing to a vehicle windscreen, comprising screening means which, when the device is in an in-use disposition on the vehicle windscreen, serves to impair a driver's view through the windscreen; suction grip means for holding said screening means in said in-use disposition on said windscreen by suction; releasing means for enabling release of the suction of said suction grip means so as to allow removal of the device from the windscreen; and security means for preventing unauthorised operation of said releasing means.

According to a second aspect of the present invention there is provided a method for securing a vehicle immobilisation device of the first aspect of the present invention to a vehicle windscreen, comprising the steps of: arranging said screening means on the vehicle windscreen in said in-use disposition so as to impair a driver's view through the windscreen; activating said suction grip means so as to hold said screening means in said in-use disposition on said windscreen; and activating said security means so as to prevent unauthorised operation of said releasing means.

According to a third aspect of the present invention there is provided a method for removing a vehicle immobilisation device secured to a vehicle windscreen by a method of the second aspect of the present invention, comprising the steps of: deactivating said security means so as to enable operation of said releasing means; operating said

releasing means to deactivate said suction grip means;  
and removing the vehicle immobilisation device from the  
vehicle windscreen.

Preferably, the screening means is changeable from  
5 a first configuration to a second configuration, the  
first configuration being more compact than the second  
configuration. The advantage of this embodiment is that  
the device may be more easily transported and/or stored  
when not in use, and yet may still serve to impair the  
10 forward visibility of the driver of the vehicle to  
which the device is secured.

Numerous means by which the screening means may be  
changed from the first, more compact, configuration to  
the second configuration, will be readily apparent to  
15 the person skilled in the art.

For example, the screening means may comprise a  
plurality of separate screen portions arranged and  
connected, for example by means of hinges, so as to be  
foldable. Alternatively, the screening means may  
20 comprise a plurality of screen portions, at least two  
of which are operable to slide relative to one another  
in a telescopic fashion. As a further alternative, the  
screening means may be rolled up from the second  
configuration to the first configuration and unrolled  
25 from the first configuration to the second  
configuration.

It will be appreciated that the number and  
location of the suction grip means will preferably, but  
not essentially, be chosen so as to enable the  
30 screening means to be held in the second configuration  
when disposed on the vehicle windscreen. For example, a  
suction grip means may be provided at or near each of  
the four corners of the screening means.

Alternatively, it may be advantageous or necessary  
35 to provide a means by which the screening means can be  
securely held in the second configuration. Appropriate

ways of achieving this will be readily apparent to the person skilled in the art and include, for example, the use of bolts, lockable hinges or other latching mechanisms to secure a plurality of hingeably connected screen portions in the second configuration.

Alternatively, one or more rigid members may be provided which at least partially span across two or more separate screen portions so as to secure the screening means in the second configuration. Similarly, in the case where the screening means may be operable to be rolled up, one or more rigid members may be usefully employed in order to help hold the screening means in the second configuration.

The screening means may be adapted to be secured to the windscreen whilst still in said first configuration or may be adapted to be secured to the windscreen after being changed to the second configuration.

Reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 is a front view of a vehicle to which a vehicle immobilisation device according to a first embodiment of the present invention has been secured;

Figure 2 is a side view of the vehicle of Figure 1;

Figure 3 is a side view of the first embodiment of the present invention shown in an open state;

Figure 4 is a plan view showing the first embodiment of the present invention in an open state;

Figure 5 is a plan view showing parts of Figure 4 in more detail;

Figure 6 is a schematic diagram for use in explaining the size and positioning of an embodiment of the present invention;



Figure 7 shows a variation of the first embodiment of the present invention having more than one suction grip;

Figure 8A is a plan view of a vehicle immobilisation device according to a second embodiment of the present invention;

Figure 8B is a side view of part of the second embodiment of the present invention; and

Figure 9 shows a third embodiment of the present invention.

Figure 1 shows a vehicle immobilisation device 1 according to a first embodiment of the present invention secured to the exterior of the windscreen 28 of a vehicle 26, and Figure 2 is a side view of the same vehicle 26 showing the vehicle immobilisation device 1 secured to the vehicle windscreen 28. The vehicle immobilisation device 1 of the first embodiment is accompanied by an adhesive sticker 30 fixed onto the front windscreen 28 warning the driver of the vehicle that no attempt should be made to move the vehicle 26 or remove the vehicle immobilisation device 1.

The vehicle immobilisation device 1 of the first embodiment of the present invention will now be described in more detail with reference to Figures 3 to 5. The vehicle immobilisation device 1 comprises a housing member 16 incorporating a suction grip 2, as well as first, second and third strut members 8, 10 and 12 respectively serving to secure said suction grip within the housing member 16. The suction grip 2 can be secured in a pivotal manner within the housing member 16, e.g. by use of a ball and socket arrangement, so as to provide the device with extra flexibility to cope with windscreen curvature.

The suction grip 2 is formed in this embodiment as a flexible rubber suction cup (such suction grips are commonly used in the glazing industry for the moving of

panes of glass), the open end of which projects a small distance through a cut-out 3 in the lower face of the housing member 16. An annular protective layer 4 of high density foam is formed on the lower face of the housing member 16 around the protruding suction grip 2, the thickness of the protective layer 4 being substantially the same as the protrusion distance of the suction grip 2.

Further incorporated within the housing member 16 is a pump handle 14 which is connected operatively to a suction device (not shown) which is operated in use to suck air from within the suction grip 2. As shown in Figure 5, the pump handle 14 is fixed to the strut members 8, 10 and 12 by fixing members 15. The strut members 8, 10 and 12 are fixed to the housing member 16 by a fixing member 24 secured to the inside of the housing member 16. A releasing mechanism (not shown) is further provided within the housing member 16 which when operated allows air to be re-introduced into the suction grip 2, thereby releasing the suction.

A covering member 18 of the vehicle immobilisation device 1 is hinged to the housing member 16 by a hinge 22. The dotted outline of the covering member 18 in Figure 3 shows the vehicle immobilisation device 1 of the present embodiment in a fully open state, while the solid-line outline of the covering member 18 shows the vehicle immobilisation device 1 in a partially open state. A retaining strut 20 is provided to retain the covering member 18 in the partially open state. A security (or locking) mechanism 6b is provided on the covering member 18 which engages with a corresponding security mechanism 6a provided on the housing member 16 when the covering member 18 is rotated to a fully closed position. When the covering member is in the closed position, the security mechanism 6a, 6b prevents

unauthorised access to and operation of the components held within the housing member 16.

The operation and deployment of the vehicle immobilisation device 1 will now be described. The vehicle immobilisation device 1 is firstly positioned on the exterior of the windscreen 28 as shown in Figure 1 with the suction grip 2 and protective layer 4 making contact with the windscreen 28. The vehicle immobilisation device 1 of the first embodiment forms a continuous opaque screen member which, when in an in-use disposition on the windscreen 28 of the vehicle 26, serves to impair the view through the windscreen of a driver of the vehicle, so as to make it impossible to drive the vehicle away in a safe and legal manner. The ideal positioning and size of the screen member will be described below with reference to Figure 6.

Once in position on the windscreen 28, the covering member 18 is swung open and retained in a partially open position by use of the retaining strut 20. Use of such a retaining strut 20 is beneficial since it prevents the covering member 18 moving to a fully open position where it might make contact with and potentially damage the surface of the vehicle 26 on which the vehicle immobilisation device 1 is being secured. Likewise, the high density foam layer 4 protects the vehicle 26 and the windscreen 28 from being scratched as the vehicle immobilisation device 1 is being fitted.

When the vehicle immobilisation device 1 is in a suitable position on the vehicle windscreen 28, the pump handle 14 is operated by the operative to pump air out of the suction grip 2 thereby to create a partial vacuum within the interior of the suction grip 2. The retaining strut 20 is then released and the covering member 18 is swung down to the fully closed position. The security mechanism 6a, 6b is activated to lock the

vehicle immobilisation device 1 closed so that unauthorised access and operation of the components within the housing member, in particular the releasing mechanism, is prevented. A warning sticker 30 is then  
5 adhered to the vehicle windscreen 28 informing the driver of the action he should take to have the device removed and warning him that attempting to drive the vehicle with the device in place would be an offence, as would an unauthorised attempt to remove the device  
10 in any way. The vehicle 26 is thus rendered substantially immobile. The adhesion created by the suction grip 2 is of such a strength as to make the forceful removal of the vehicle immobilisation device from the vehicle windscreen almost impossible; such an  
15 attempt to remove the device would anyway be illegal.

The vehicle immobilisation device 1 is removed from the vehicle windscreen 28 by first deactivating the security mechanism 6a, 6b, opening the covering member 18 to the partially opened state by use of the  
20 retaining strut 20, and then operating the releasing mechanism (not shown) to release the partial vacuum from the suction grip 2. The vehicle immobilisation device 1 can then be removed from the vehicle windscreen 28 and stowed away for subsequent re-  
25 application.

When the vehicle immobilisation device 1 is in an armed state and secured to the vehicle windscreen 28, it sits flush to the windscreen 28 with the high-density foam protective layer 4 in contact with the  
30 windscreen 28 and the suction grip 2 holding the device 1 in tight contact with the windscreen 28. The size of the gap between the housing member 16 and the windscreen 28 is preferably of the order of millimetres, with the gap being filled by the high  
35 density foam protective layer 4. The small size of the gap makes the prising-off of the vehicle immobilisation

device 1 or the use of other invasive methods of removal more difficult. In the present embodiment the high density foam protective layer 4 not only serves to prevent scratches and the like to the vehicle

5 windscreen 28 but it also serves as a suction grip protection mechanism to prevent insertion of a piercing instrument or the like which may be used in an attempt to pierce the suction grip 2. Use of a toughened rubber compound for the suction grip is also beneficial  
10 to make piercing more difficult should this be attempted.

As shown in Figure 2, the vehicle immobilisation device 1 assumes a substantially flat profile on the vehicle windscreen 28. The lateral dimensions of the  
15 vehicle immobilisation device 1 are determined by the basic requirement that the vehicle immobilisation device must serve its purpose of impairing the forward visibility of a driver of the vehicle to which the device is secured to such an extent as to render the  
20 vehicle dangerous and illegal to drive. A very wide screening member will provide good vision impairment but may result in a vehicle immobilisation device which is too large or bulky for ease of use, while a narrower screening member will result in a more lightweight  
25 device but will provide less vision impairment.

Figure 6 is a schematic diagram showing the relative positions of the vehicle immobilisation device 1, the driver's eye 45 and the driver's view of the road 40 ahead. For the purpose of this illustration,  
30 it is assumed that the vehicle immobilisation device 1 is square-shaped. The vehicle immobilisation device 1 is preferably positioned on the vehicle windscreen 28 such that the centre of the vehicle immobilisation device 1 is directly in the usual line of sight from  
35 the driver's eye 45 to the road 40 lying ahead of the driver.

The distance  $d$  between the driver 45 and the windscreen 28 on which the vehicle immobilisation device 1 is secured will vary from vehicle to vehicle and from driver to driver, but an estimate of the maximum distance  $d$  will serve as a useful guide for the selection of appropriate width  $2w$  for the vehicle immobilisation device 1 (the distance is limited by the reach of the driver to the steering wheel). One parameter by which to measure the degree of vision impairment provided by the vehicle immobilisation device 1 is the angle  $\theta$  shown in Figure 6. The greater the value of  $\theta$ , the more impairment of the driver's view through the windscreen is provided. For effective impairment, the value of  $\theta$  is preferably more than  $5^\circ$ , and more preferably greater than  $10^\circ$ , and more preferably greater than  $15^\circ$ . The width  $2w$  of the vehicle immobilisation device 1 is then calculated from the chosen value of  $\theta$  according to the following formula:  $w = d \tan \theta$ .

Although the first embodiment has been described as having a single suction grip 2 located substantially in the centre of the vehicle immobilisation device 1, it will be appreciated that a greater number of suction grips can be provided and placed at various positions on the vehicle immobilisation device. For example, Figure 7 shows a vehicle immobilisation device 1a that comprises four separate suction grips 2a located towards the four corners of the vehicle immobilisation device 1a. Although it is preferable for the high density foam protective layer to cover substantially the entire lower surface of the housing member 16, this is by no means essential. For example, in the vehicle immobilisation device 1a of Figure 7 the foam protective layer 4 is confined to the vicinity around the suction grips 2a as shown by the dotted lines in Figure 7. Such a foam layer 4a is still able to

provide protection against scratches and the like, and it still serves the purpose of hindering access of an invasive device to the suction grips 2a.

5 The first embodiment is described above as being provided with its own means for producing the required partial vacuum in the suction grip 2 by way of a pump handle 14 operating a suction device (not shown). It will be appreciated that it is not necessary to provide a vehicle immobilisation device embodying the invention  
10 with its own means for producing a partial vacuum, but instead it would be possible to provide suitable means for connecting the suction grip to an external suction device. The operative would simply attach the external suction device to the vehicle immobilisation device  
15 when required in order to create the partial vacuum in the suction grip.

In the above first embodiment, the covering member 18 serves as the primary screening member that serves to impair the driver's forward visibility, although  
20 clearly other parts of the vehicle immobilisation device also serve the function of screening, in some degree or another, the view of the road ahead from the driver. For example, the housing member 16 and the suction grip 2 are both opaque in this embodiment and  
25 therefore act to impair the driver's vision. However, it is the covering member 18 in the first embodiment that is principally intended to function as the screening member.

In contrast to the first embodiment in which the  
30 principal screening member is constructed as a single entity, a second embodiment will now be described with reference to Figures 8A and 8B, in which the screening member comprises a plurality of separate sections.

Figure 8A is a plan view showing a vehicle  
35 immobilisation device 1b according to a second embodiment of the present invention. The vehicle

immobilisation device 1b comprises three separate screen portions 11-1, 11-2 and 11-3. The vehicle immobilisation device 1b of the second embodiment comprises four suction grips 2b, two of which are  
5 located on the first screen portion 11-1 and the other two of which are located on the third screen portion 11-3. A security device is provided for each of the suction grips 2b, comprising a security lid 18b connected by a hinge 22b to the appropriate screen  
10 portion 11-1 or 11-3, the lid 18b being secured by means of a locking mechanism 66. The first screen portion 11-1 is hinged to the second screen portion 11-2 which itself is hinged to the third screen portion 11-3 by use of hinges 50.

15 Figure 8B is a side view showing in more detail the construction of one of the suction elements of the vehicle immobilisation device 1b. As in the first embodiment, a protective layer 4b is arranged around each suction grip 2b. It will be appreciated that the  
20 provision of such a protection layer is preferable but not essential. The locking mechanism 66 shown in Figure 8A is shown in Figure 8B to comprise a first locking element 66b provided on the security lid which engages with a second locking element 66a provided on  
25 the screen member concerned (11-3 in Figure 8B).

In order to save space, in the second embodiment, each suction grip 2b is not provided with its own suction device and pump handle as in the first  
30 embodiment. Instead, a pump connection mechanism 70 is provided which enables the suction grip 2b to be connected to an external pump device at the time of securing the device 1b to the vehicle windscreen. After the suction grip 2b has been activated so as to provide a grip on the windscreen, the external pump  
35 device is removed from the connection mechanism, the securing lid 18b is closed, and the locking mechanism



66 is activated to prevent unauthorised removal of the device 1b.

Removal of the vehicle immobilisation device 1b of the second embodiment is achieved by deactivating the locking mechanisms 66 in turn, opening each of the security lids 18b, and operating the releasing means so as to deactivate the suction grips. Once removed, the vehicle immobilisation device 1b can be folded or rolled up for compact storage.

It will be appreciated that the security lids 18b of the second embodiment need not be hinged to one of the screen portions 11-1 to 11-3. Instead a security lid may be in the form of a removable cap, preferably secured to the vehicle immobilisation device by a securing wire or the like so as to prevent the loss thereof.

Other arrangements of screen portions and associated folding mechanisms will be readily apparent to the person skilled in the art. For example, Figure 9 shows a vehicle immobilisation device 1c comprising two screen portions 33-1 and 33-2, a suction grip 2c provided on the first screen portion 33-1 and a security lid 18c connected by a hinge 22c to the screen portion 33-1. A locking mechanism 66c is also provided.

The screen portion 33-2 is provided, at opposing edges 34 and 35, with a receiving section. The screen portion 33-1 is arranged so as to be slideably received within the receiving section in a telescopic fashion, thereby allowing the device to be moveable from a first, more compact configuration, to a second configuration large enough to impair a driver's view when disposed on the vehicle windscreen. A pair of rigid members 37a and 37b are provided on the screen portion 33-2, each rigid member comprising a foldable strut which may be extended to span across both screen

portions and secured in an extended configuration by a latch, a locking means or any other suitable means.

Figure 9A illustrates the device when between the  
5 first configuration and the second configuration, the screen portion 33-1 being partially received within the receiving section 33-2. The rigid members 37a and 37b are shown in a folded configuration. Figure 9B shows the device in the second configuration, the rigid  
10 members shown in an extended configuration. Figure 9C shows a sectional view through the line A-A.

Although the principal use of a vehicle immobilisation device embodying the present invention has been suggested as being an alternative to a  
15 traditional wheel clamp device for dealing with illegally parked vehicles, it will be appreciated that such a device embodying the present invention will find an application in any situation where the removal of a vehicle is to be prevented. For example an embodiment  
20 of the present invention can be used as a vehicle security device to prevent theft of the vehicle to which it is secured.

CLAIMS:

1. A vehicle immobilisation device for securing to a vehicle windscreen, comprising:
  - 5 screening means changeable from a first configuration to a second configuration, the first configuration being more compact than the second configuration and the second configuration being large enough to impair a driver's view through the windscreen
  - 10 when the device is in an in-use disposition on the vehicle windscreen;  
suction grip means for holding said screening means in said in-use disposition on said windscreen by suction;
  - 15 releasing means for enabling release of the suction of said suction grip means so as to allow removal of the device from the windscreen; and  
security means for preventing unauthorised operation of said releasing means.
  - 20
2. A vehicle immobilisation device as claimed in claim 1, further comprising suction means for producing the suction in said suction grip means.
- 25 3. A vehicle immobilisation device as claimed in claim 2, wherein said suction means are operable manually by the user of the device to produce the suction in said suction grip means.
- 30 4. A vehicle immobilisation device as claimed in claim 3, further comprising a pump handle that is operated by said user to produce the suction.
5. A vehicle immobilisation device as claimed in claim 4, wherein said pump handle is formed and  
35 arranged so as to serve also as a grip handle for

lifting and carrying the vehicle immobilisation device.

5 6. A vehicle immobilisation device as claimed in any preceding claim, comprising housing means for housing said releasing means, and covering means moveable between an open position allowing access to said releasing means and a closed position preventing access to said releasing means, said security means serving to lock said covering means in said closed position.

10

7. A vehicle immobilisation device as claimed in claim 6, wherein said covering means comprise a hinged lid.

15 8. A vehicle immobilisation device as claimed in claim 6 or 7, wherein said covering means also act as said screening means.

20 9. A vehicle immobilisation device as claimed in any preceding claim, wherein said suction grip means comprise a plurality of suction grips.

25 10. A vehicle immobilisation device as claimed in claim 9, when read as appended to claim 6, wherein covering means and security means are provided separately for each of said plurality of suction grips.

30 11. A vehicle immobilisation device as claimed in any preceding claim, further comprising a protective layer arranged to cushion the vehicle windscreen from contact with the device during fitting and when in said in-use disposition on said vehicle windscreen.

35 12. A vehicle immobilisation device as claimed in claim 11, wherein said protective layer is formed of high density foam.

13. A vehicle immobilisation device as claimed in any preceding claim, comprising suction grip protection means for preventing access to said suction grip means from the under-side of the device facing the windscreen when in said in-use disposition.

14. A vehicle immobilisation device as claimed in claim 13, when read as appended to claim 11, wherein said protective layer is arranged around said suction grip means so as to serve as said suction grip protection means.

15. A vehicle immobilisation device as claimed in any preceding claim, wherein said device is arranged to sit flush to said vehicle windscreen when in said in-use disposition.

16. A vehicle immobilisation device as claimed in any preceding claim, wherein parts of the device visible from the exterior of the vehicle when the device is in said in-use disposition are decorated in a highly visible finish.

17. A vehicle immobilisation device as claimed in claim 16, wherein said highly visible finish is a reflective finish.

18. A vehicle immobilisation device as claimed in any preceding claim, wherein said screening means comprise a plurality of screen portions.

19. A vehicle immobilisation device as claimed in claim 18, wherein said screen portions are arranged and connected so as to be foldable or operable to be rolled up.

20. A vehicle immobilisation device as claimed in any preceding claim, where said suction grip means comprise one or more suction cups.

5

21. A vehicle immobilisation device as claimed in any preceding claim, wherein the device assumes a substantially flat profile when in said in-use disposition.

10

22. A vehicle immobilisation device as claimed in any preceding claim, wherein the width of the device is of the order of  $2d \tan \theta$ , where  $d$  is an estimate of the distance from the driver's eye to the vehicle

15 windscreen, and  $\theta$  is greater than  $5^\circ$ .

23. A vehicle immobilisation device as claimed in claim 22, wherein  $\theta$  is greater than  $10^\circ$ .

20 24. A vehicle immobilisation device as claimed in claim 23, wherein  $\theta$  is greater than  $15^\circ$ .

25. A method for securing a vehicle immobilisation device as claimed in any preceding claim to a vehicle  
25 windscreen, comprising the steps of:

changing said screening means from said first configuration to said second configuration;

arranging said screening means on the vehicle  
windscreen in said in-use disposition so as to impair a  
30 driver's view through the windscreen;

activating said suction grip means so as to hold  
said screening means in said in-use disposition on said  
windscreen; and

activating said security means so as to prevent  
35 unauthorised operation of said releasing means.

26. A method as claimed in claim 25, wherein said screening means are arranged on said vehicle windscreen such that the centre of the screening means is substantially in the driver's line of vision.

5

27. A method as claimed in claim 25 or 26, wherein the vehicle immobilisation device is placed on the exterior of the vehicle windscreen.

10 28. A method as claimed in claims 25, 26 or 27, further comprising the step of applying an information sticker to the windscreen.

15 29. A method for removing a vehicle immobilisation device secured to a vehicle windscreen by a method as claimed in any one of claims 25 to 28, comprising the steps of:

de-activating said security means so as to enable operation of said releasing means;

20 operating said releasing means to deactivate said suction grip means;

removing the vehicle immobilisation device from the vehicle windscreen; and

25 changing said screening means from said second configuration to said first configuration.

30. A method of preventing a vehicle from being driven away, comprising:

30 changing a screening means from a first configuration to a second configuration, the first configuration being more compact than the second configuration;

35 employing suction grip means to attach the screening means by suction to the vehicle windscreen so that the screening means having said second

configuration impairs a driver's view through the windscreen; and

securing the suction grip means against release of the suction so as to prevent unauthorised removal of the screening means from the windscreen.

31. A vehicle immobilisation device substantially as hereinbefore described with reference to the accompanying drawings.

10

32. A method for securing a vehicle immobilisation device substantially as hereinbefore described with reference to the accompanying drawings.

15 33. A method for removing a vehicle immobilisation device substantially as hereinbefore described with reference to the accompanying drawings.

20 34. A method of preventing a vehicle from being driven away substantially as hereinbefore described with reference to the accompanying drawings.




ABSTRACTVEHICLE IMMOBILISATION DEVICE

A vehicle immobilisation device is provided for  
5 securing to a vehicle windscreen, comprising screening  
means (18) which, when the device is in an in-use  
disposition on the vehicle windscreen, serves to impair  
a driver's view through the windscreen; suction grip  
means (2) for holding said screening means (18) in said  
10 in-use disposition on said windscreen by suction;  
releasing means (not shown) for enabling release of the  
suction of said suction grip means (2) so as to allow  
removal of the device from the windscreen; and security  
means (6a, 6b) for preventing unauthorised operation of  
15 said releasing means.

[Fig. 3]

FIG. 1

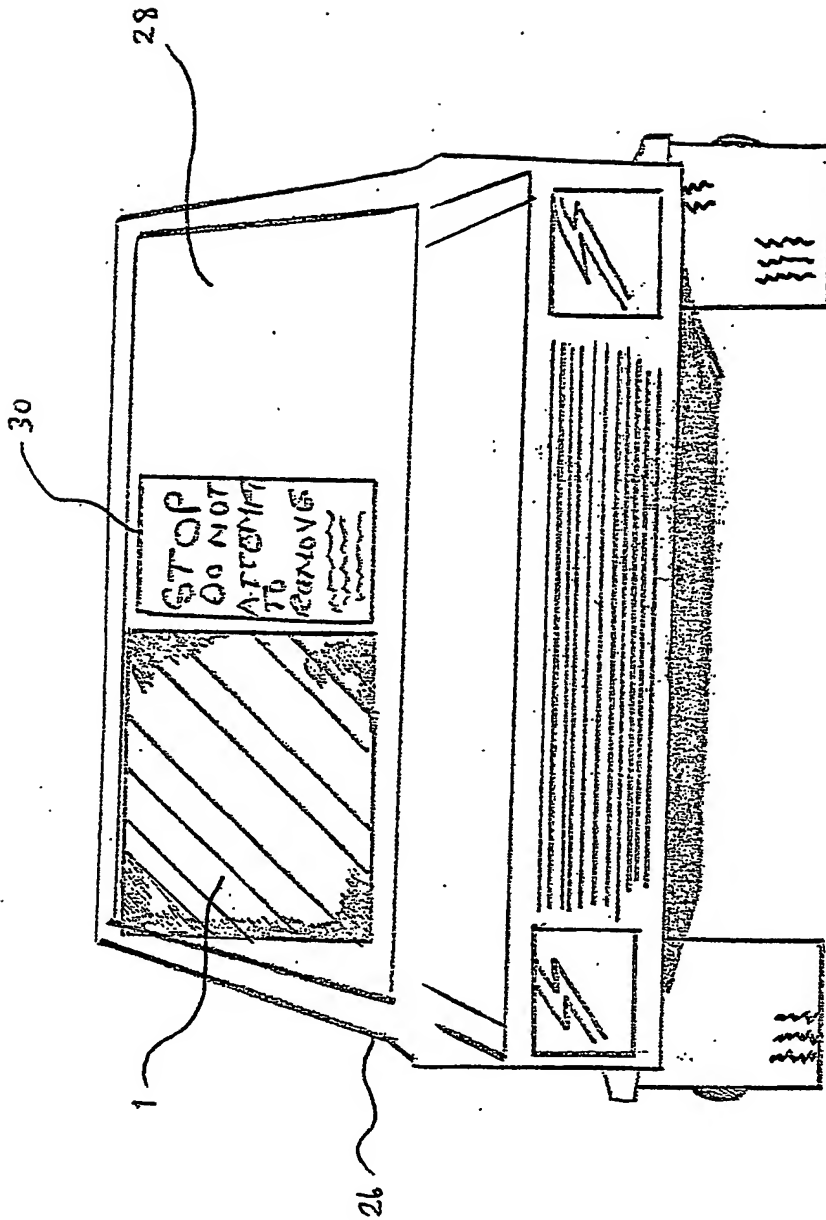

2/9 100

FIG. 2



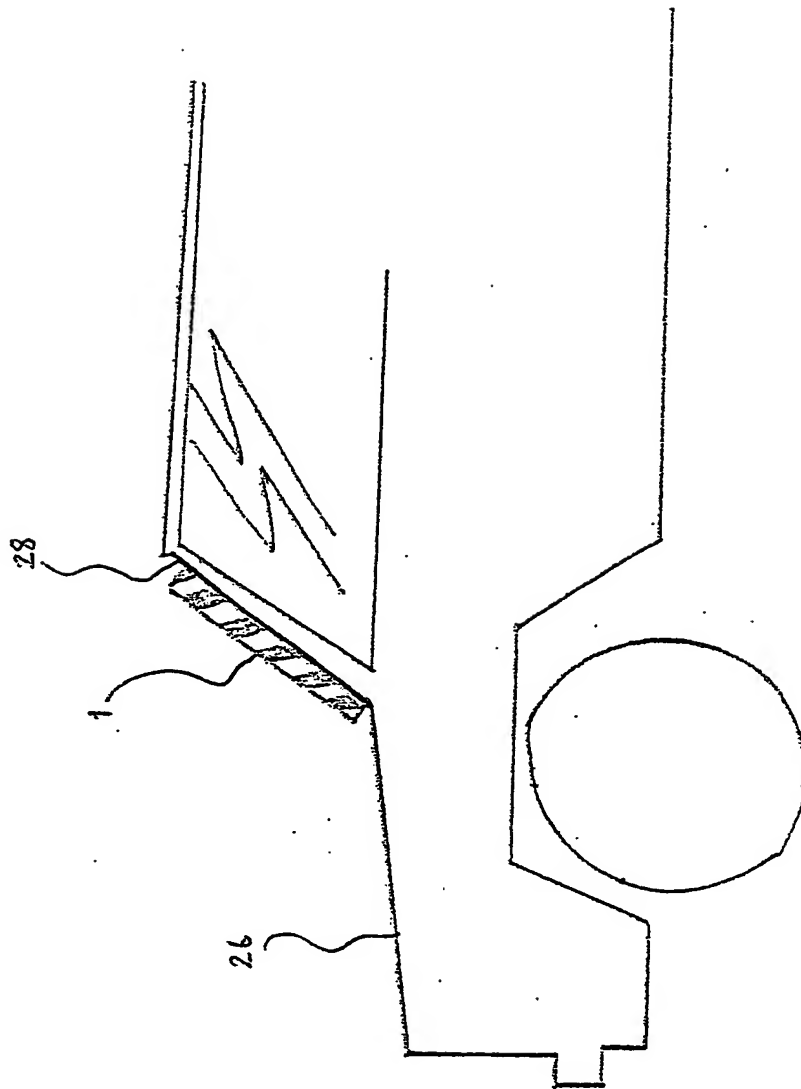


FIG. 3. 3/9

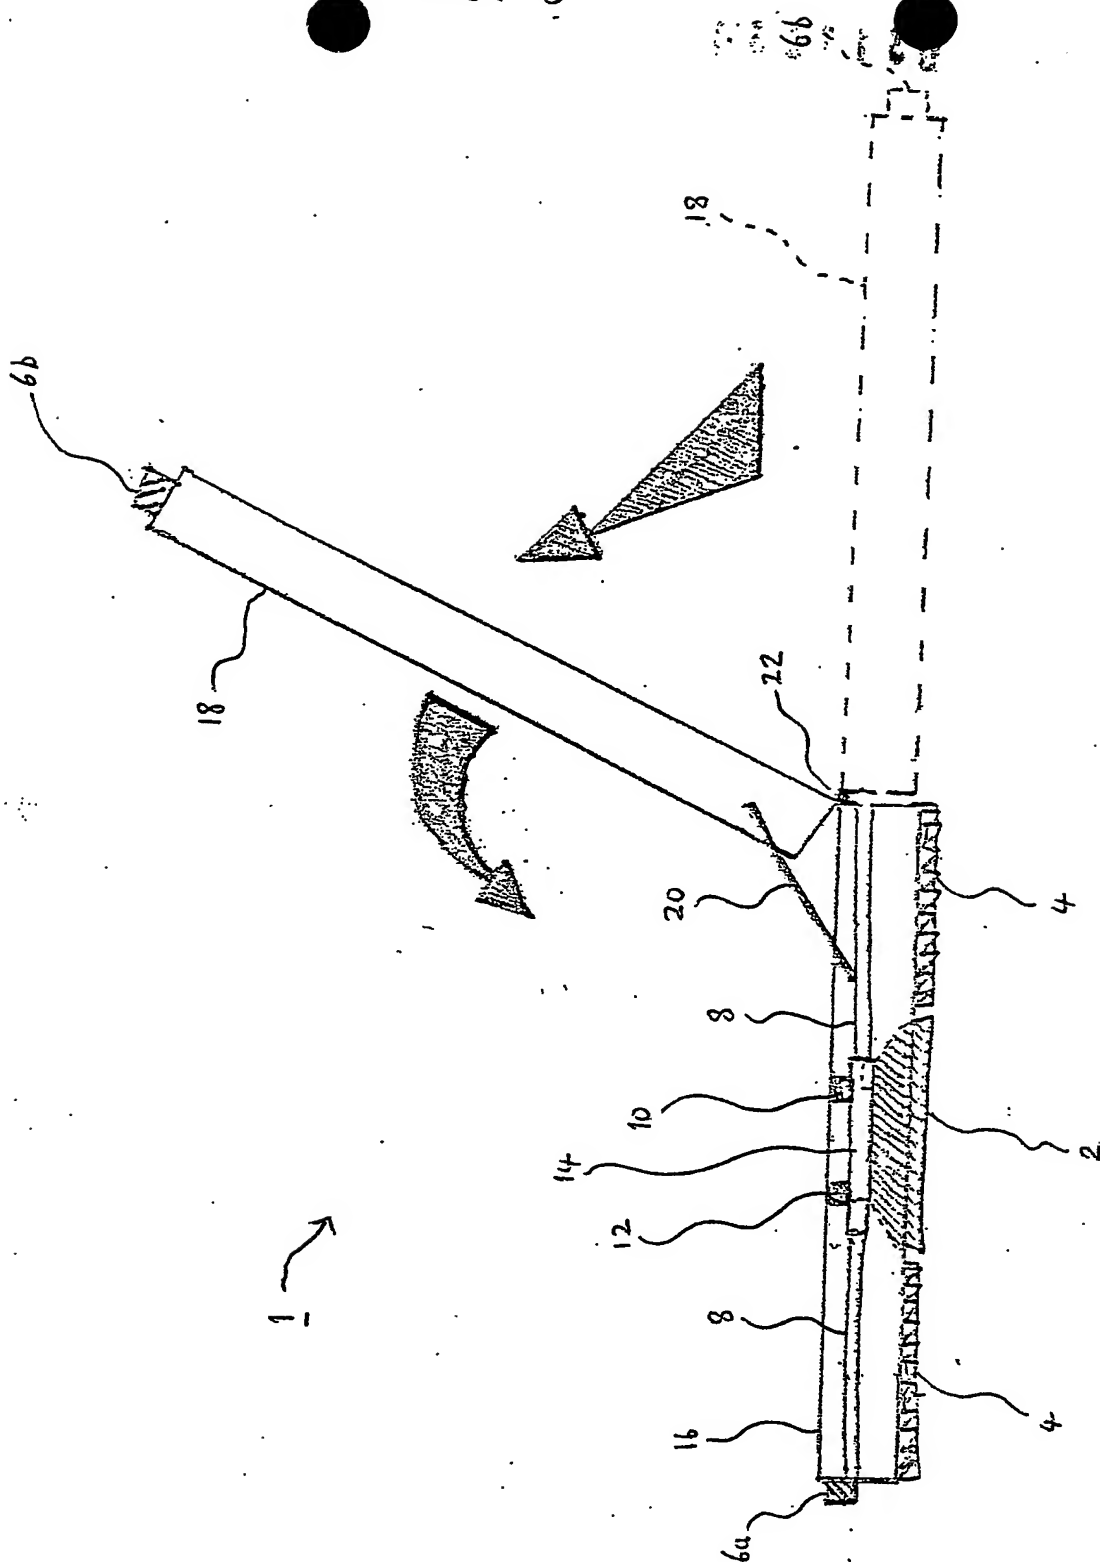


4/2

FIG. 4

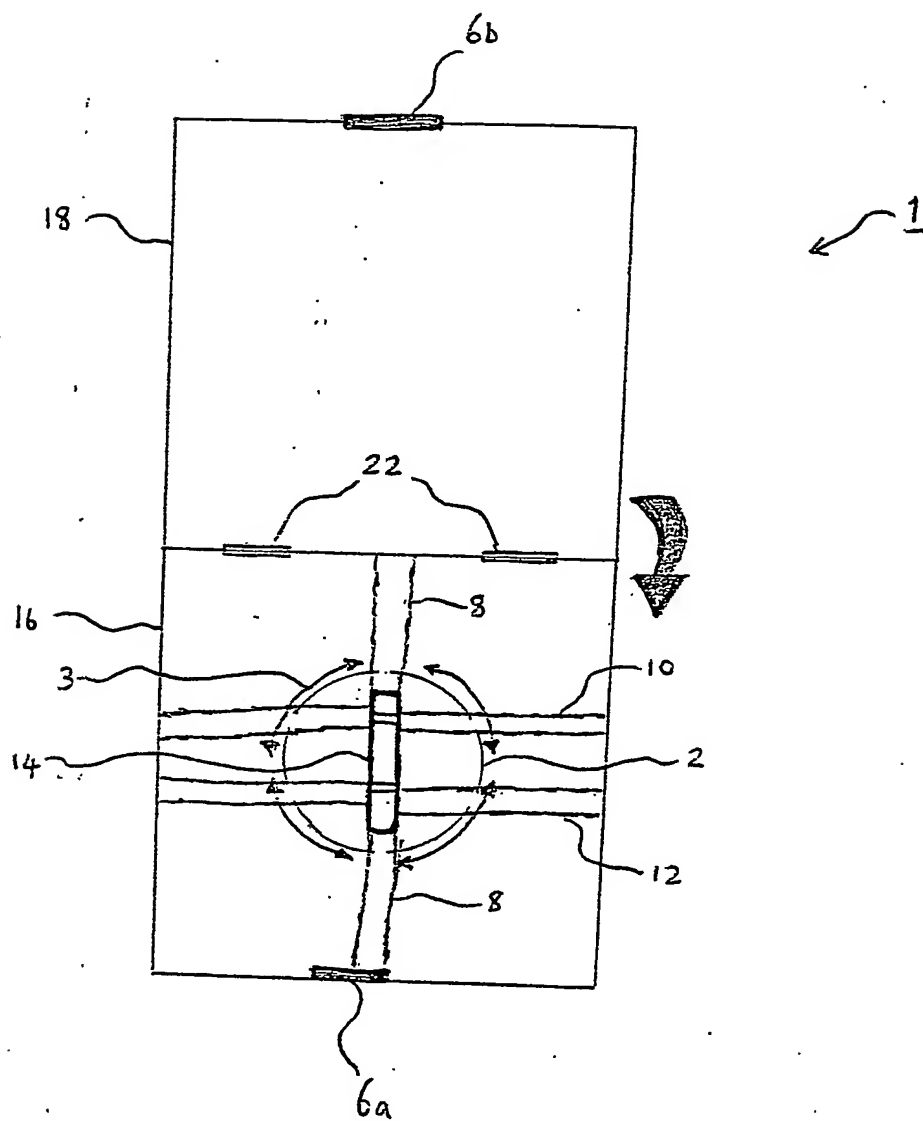


5/4


FIG. 5

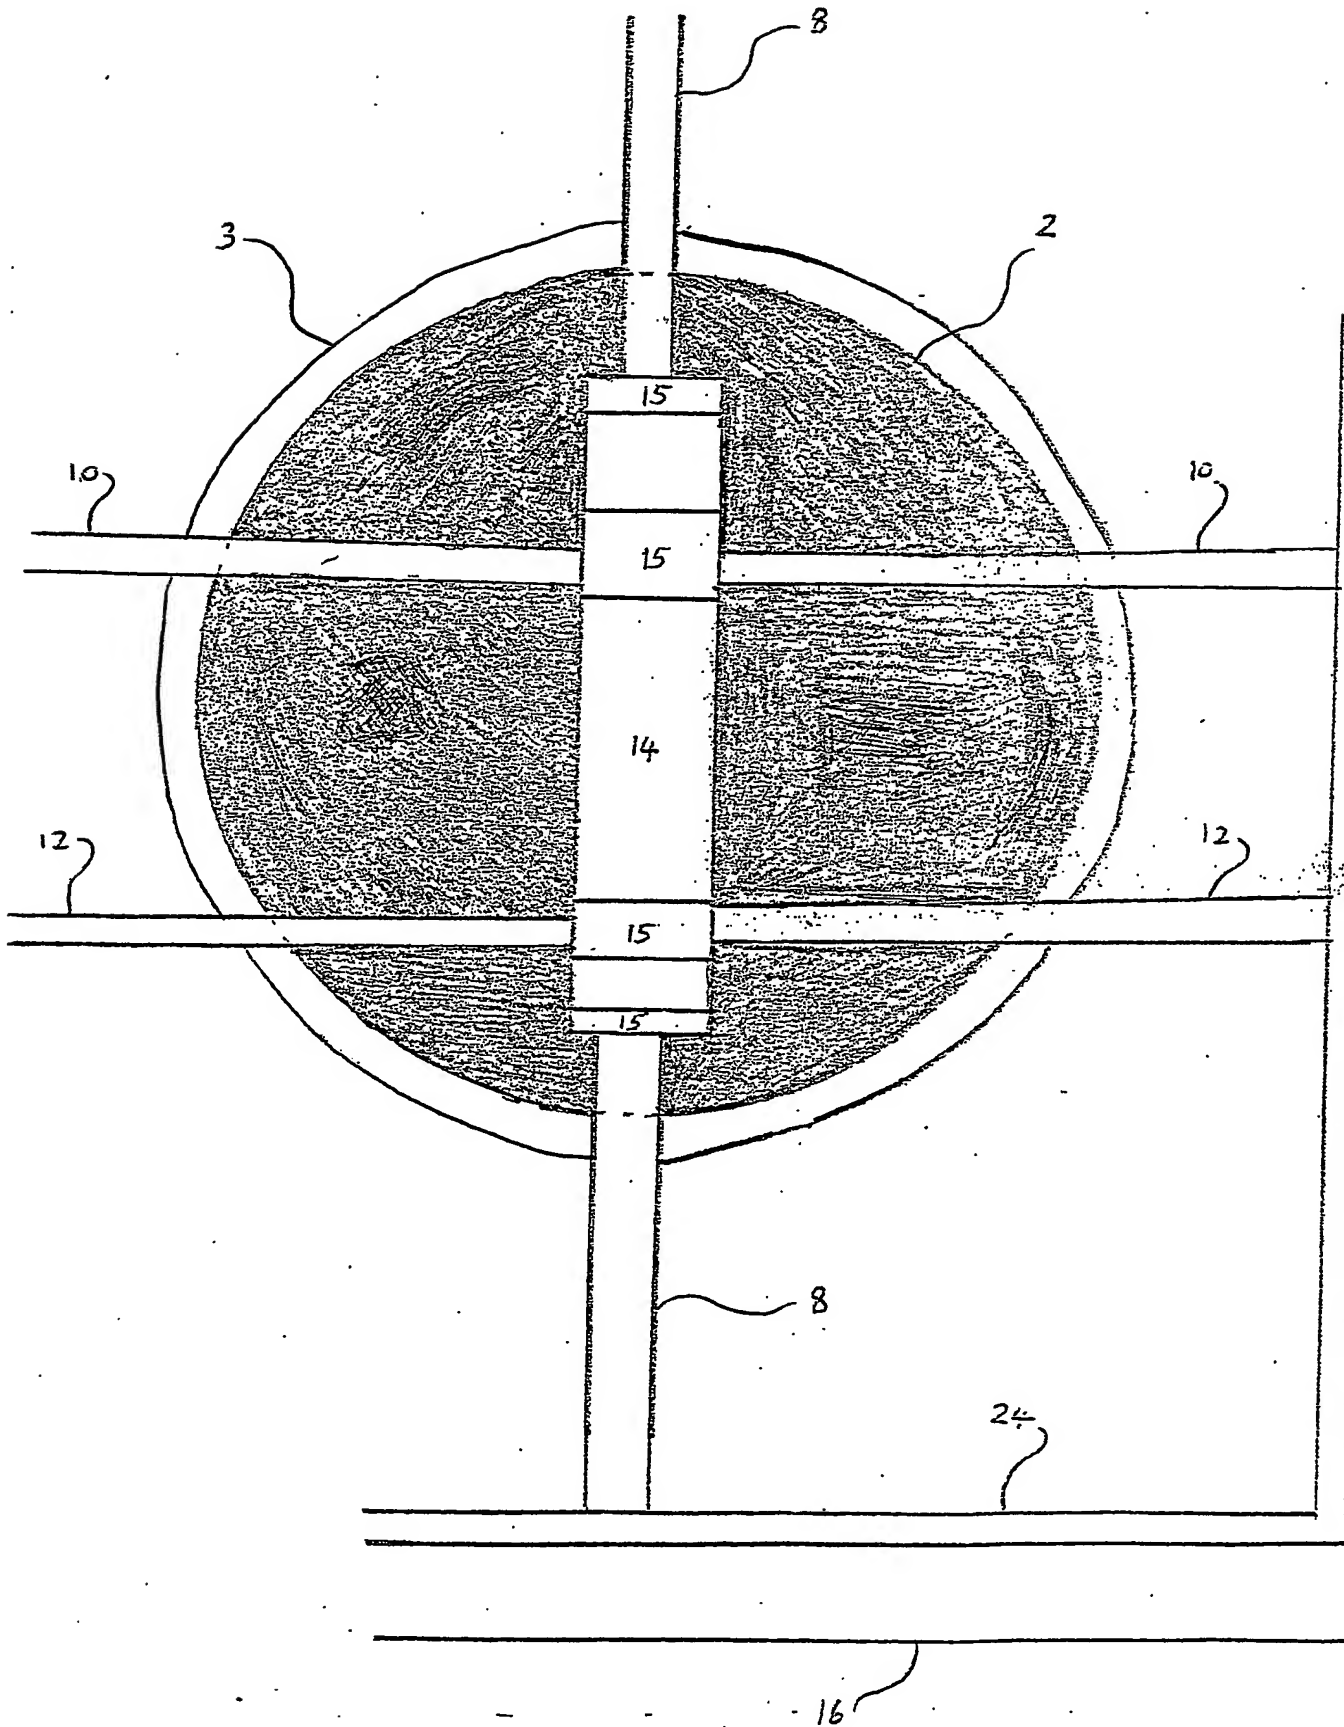

6/9  
FIG. 6

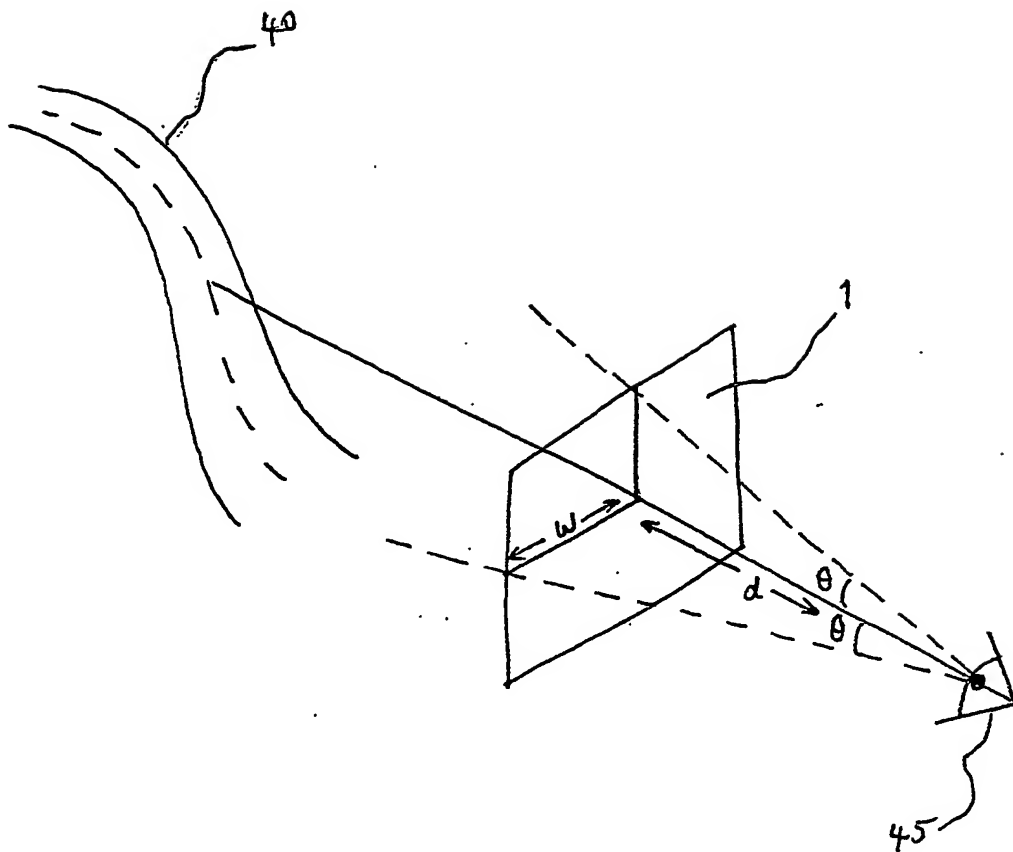

7/9  
FIG. 7

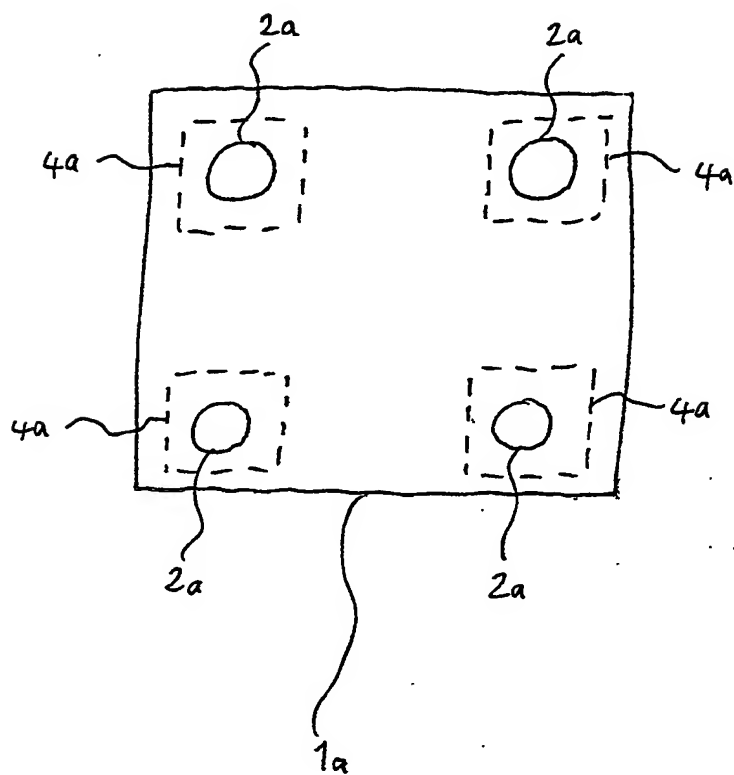



8/24/2010

FIG. 8A

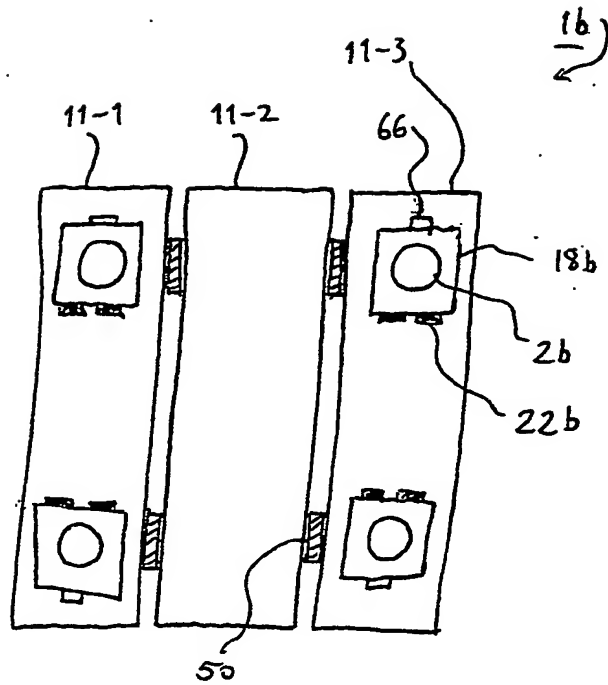


FIG. 8B

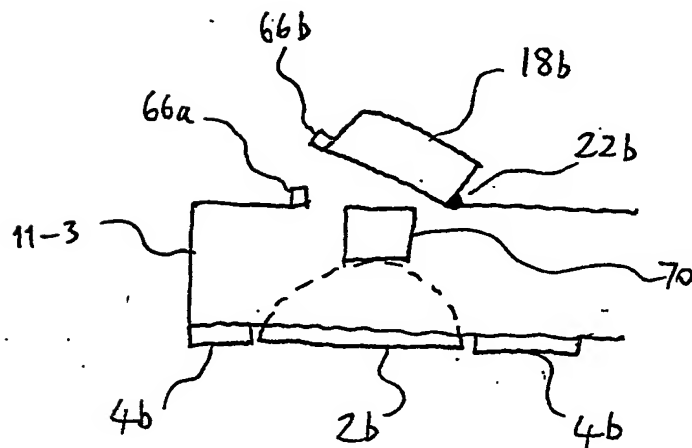


Figure 9

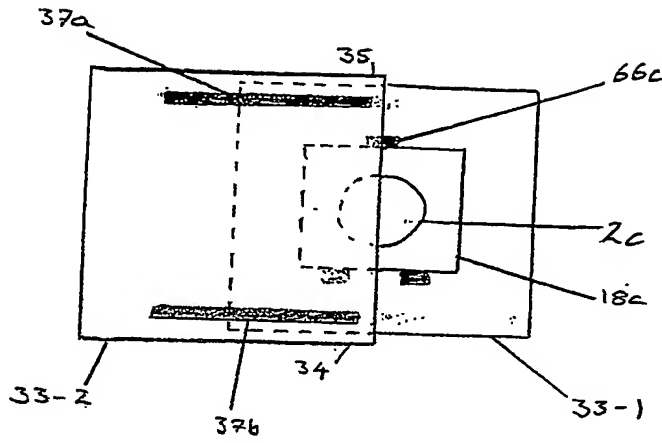


Figure 9A

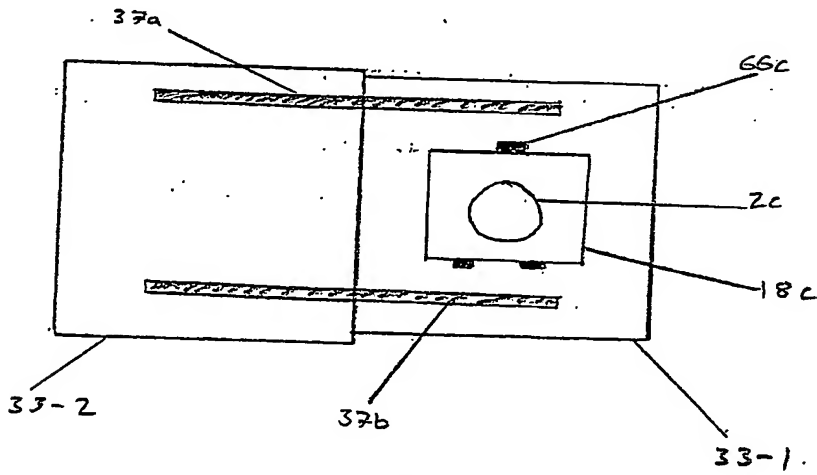


Figure 9B

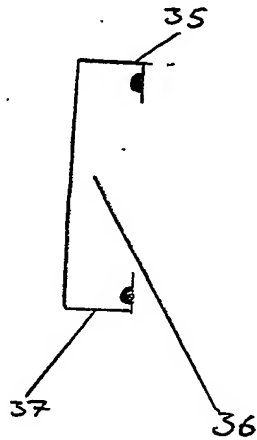


Figure 9C

PCT Application

**GB0304952**

